

## COMBIMAX WET FEATURES



With an **efficient compression ratio** waste compactors are highly efficient alternatives to waste skips.

**Compaction force 35 t.**

**Liquid-proof solution** for wet waste.

**Robust** structure. Designed and manufactured for **versatile conditions**.



### SMART 5G

- Automatic pick-up request
- Remote maintenance
- Filling prediction
- Additional emptying request

Built-in **SMART-technology** guarantees the **energy efficiency** of the waste compactor. CombiMax WET uses less electricity than traditional waste compactors.



# COMBIMAX WET



## ROBUST MOBILE WASTE COMPACTOR FOR WET WASTE



SMART WASTE MANAGEMENT  
[europressgroup.com](http://europressgroup.com)

**Europress Group Ltd**  
Huhtimontie 16  
FI-04200 Kerava, Finland  
+358 20 737 3100  
[europress@europress.fi](mailto:europress@europress.fi)

# COMBIMAX WET FEATURES

Also available with an elevated compactor unit.

The package includes a liquid proof set up as a standard.

### Best-selling accessories:

- Tipping device (not available with elevated compacting unit)
- Automatic lid opening mechanism (hydraulic/electric)
- Custom colour
- Platform hopper
- Lowered infeed
- Drainage system
- Ozone generator/cooler device
- Bottom heating system
- Wheels, front/rear

Several standard container sizes  
**10–20 m<sup>3</sup>.**

The device has a **GPS module as standard**, which means that the location of the device can be located even during transport.



# TECHNICAL SPECIFICATIONS



| COMBIMAX WET                      |                                 |
|-----------------------------------|---------------------------------|
| Infeed aperture gross L x H (mm)  | 1930 x 1800**                   |
| Infeed aperture L x H (mm)        | 1850 X 1300                     |
| Compaction force (t)              | 35 / 40*                        |
| Cycle time (s)                    | 66 / 35*                        |
| Capacity (m3/h)                   | 78 / 147*                       |
| Infeed height (mm) - front / side | 1480 / 1300***                  |
| Noise level (dBA)                 | ≤ 70                            |
| Motor (kW)                        | 5,5 / 7,5*                      |
| Power supply                      | 400 V 3xC16 A<br>400 V 3xC32 A* |

\*\* hopper 4, platform 1200 mm

\*\*\* lowered infeed

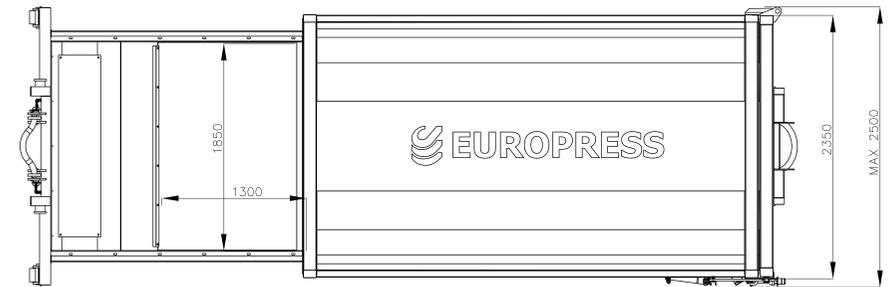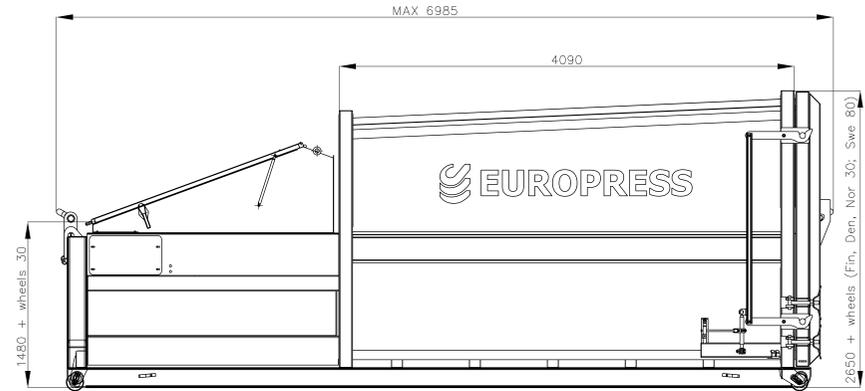

**The dimension drawing is of CombiMax WET compactor with container size of 20 m<sup>3</sup>. This is our best-selling CombiMax WET device.**

We manufacture devices in many different sizes, customized to the various needs of our customers. You can find out more about different measurements from our sales or from your own contact person.



**WASTE FRACTIONS**  
Wet mixed waste

