

# COMBIOMOD FEATURES

The **pendulum ram structure** ensures that no waste accumulates behind the press ram.

## Extremely durable

- Most of the hydraulic and all electrical parts are completely isolated from the compactor chamber.
- Liquid-proof solution for wet waste.

Water proof design **effectively eliminates water leaks** and minimizes odors.

**Robust** structure. Designed and manufactured for **versatile conditions**.



## SMART 5G

- Automatic pick-up request
- Remote maintenance
- Filling prediction
- Additional emptying request

Built-in **SMART-technology** guarantees the **energy efficiency** of the waste compactor. Combi-MOD uses less electricity than traditional waste compactors.



# COMBIOMOD



## LIQUID PROOF MOBILE WASTE COMPACTOR FOR WET WASTE



**Europress Group Ltd**  
Huhtimontie 16  
FI-04200 Kerava, Finland  
+358 20 737 3100  
europress@europress.fi

# COMBIOMOD FEATURES

The package includes a liquid proof set up as a standard.

Lowered infeed is provided as a standard feature, making it easier to use when fed from ground level.

Can be supplied with a wide range of accessories.

### Best-selling accessories:

- Tipping device (not available with raised compacting unit)
- Automatic lid opening mechanism (hydraulic/electric)
- Custom specific colour
- Narrower container
- Platform hopper
- Drainage system
- Ozone generator/cooler device
- Bottom heating system
- Wheels, front/rear

Several standard container sizes **10–22 m<sup>3</sup>**. In particular, the **13 m<sup>3</sup>** size container is especially popular.

The device has a **GPS module as standard**, which means that the location of the device can be located even during transport.




**WASTE FRACTIONS**  
Bio waste  
Wet mixed waste

# TECHNICAL SPECIFICATIONS



COMBIOMOD	
Infeed aperture gross L x H (mm)	1400 x 1370**
Infeed aperture L x H (mm)	1700 x 1050
Compaction force (t)	35
Cycle time (s)	32
Infeed height (mm) - front	1300
Noise level (dBA)	≤ 70
Motor (kW)	5,5
Power supply	400 V 3xC16 A

\*\* hopper 4, platform 1200 mm

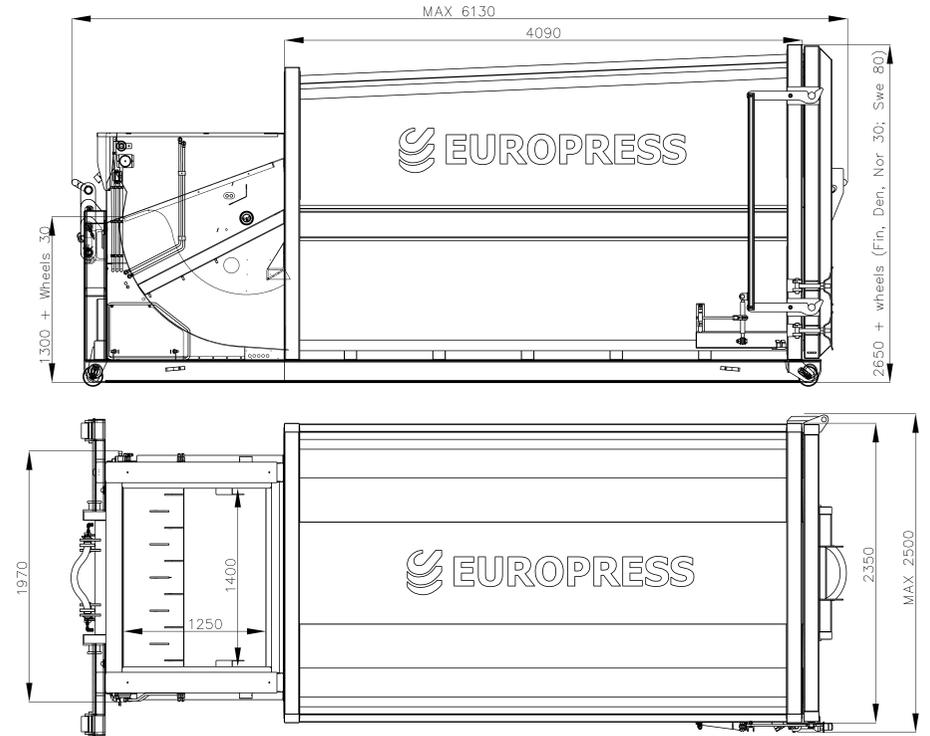

The dimension drawing is of CombiMOD compactor with container size of 20 m<sup>3</sup>. This is our best-selling CombiMOD device.

We manufacture devices in many different sizes, customized to the various needs of our customers. You can find out more about different measurements from our sales or from your own contact person.

