

DUOMAX XL FEATURES



With an **efficient compression ratio** waste compactors are highly efficient alternatives to waste skips. **Compaction force 35 t.**

Large filling opening makes usage quick and effortless. **The spacious service door for the cylinder** compartment provides effortless access to maintenance points.

The large container size allows for higher filling weights. This saves transportation costs, reduces CO₂ emissions, and decreases the need for heavy traffic in the waste generation area.

The container is detached for transport while the compactor unit remains in place, making wall-through feeding easier and more airtight.

Quiet operating sound.



SMART 5G

- Automatic pick-up request
- Remote maintenance
- Filling prediction
- Additional emptying request

Built-in SMART-technology guarantees the **energy efficiency** of the waste compactor. DuoMax XL uses less electricity than traditional waste compactors.



DUOMAX XL



VERSATILE WASTE COMPACTOR WITH DETACHED CONTAINER



SMART WASTE MANAGEMENT SOLUTIONS
europressgroup.com

Europress Group Ltd
Huhtimontie 16
FI-04200 Kerava
+358 20 737 3100
europress@europress.fi

DUOMAX XL OMINAIUUDET

Standard equipment includes **a cable stop** – together with the tarpaulin cover, it ensures that waste stays inside the container during transport.

Can be supplied with a range of accessories.

Best-selling accessories

- Tipping device
- Specially designed feed hopper
- Custom colour
- Detachable lowered infeed
- Lid opening mechanism (hydraulic/electric)
- Top-hinged container
- Code start
- Additional buttons, e.g., extra emergency stop switch

Several standard container sizes **20 – 32 m³**.



The compactor unit also comes with a GPS module as standard.



WASTE FRACTIONS

- Cardboard
- Plastic
- Mixed waste

TECHNICAL SPECIFICATIONS

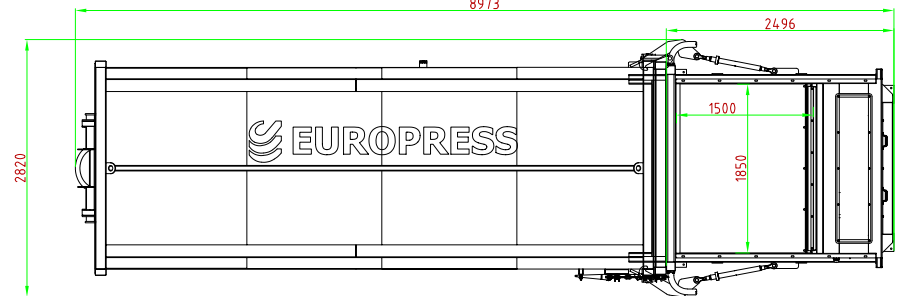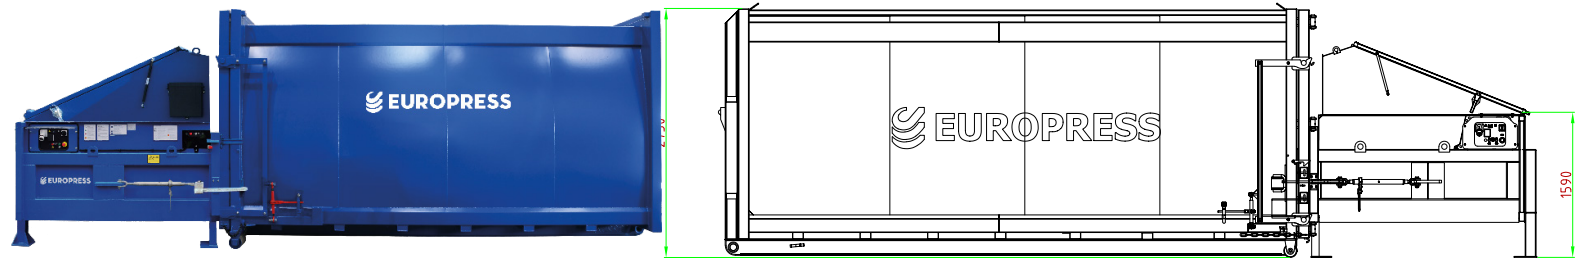

DUOMAX XL	
Infeed aperture gross L x H (mm)	1930 x 1800**
Infeed aperture net L x H (mm)	1850 x 1500
Compaction force (t)	35/40*
Cycle time (s)	66/35*
Capacity (m3/h)	78/147*
Infeed height (mm) - front / side	1590/1340 1660/1410
Noise level (dBa)	≤70
Motor (kW)	5,5 / 7,5*
Power supply	400 V 3xC16 A 400 V 3xC32 A*

**hopper 4, platform 1200 mm

The dimension drawing is of DuoMax XL compactor with container size of 20 m³. This is our best-selling DuoMax XL device. We manufacture devices in many different sizes, customized to the various needs of our customers. You can find out more about different measurements from our sales or from your own contact person.

