

# COMBIMAX XL FEATURES



With an **efficient compression ratio** waste compactors are highly efficient alternatives to waste skips.  
**Compaction force 35 t.**

An easy-to-use and efficient waste compactor equipped with an **extra large feed opening**, ideal for compressing large cardboard boxes. **The spacious service door** for the cylinder compartment provides effortless access to maintenance points. The compactor unit is attached to the container.

**Quiet** operating sound.

**Strong structure.** Designed and manufactured for **northern climate conditions.**



### SMART 5G

- Automatic pick-up request
- Remote maintenance
- Filling prediction
- Additional emptying request

**Built-in SMART-technology** guarantees the **energy efficiency** of the waste compactor. CombiMax XL uses less electricity than traditional waste compactors.



Safety standard  
**EN 16486**



# COMBIMAX XL



## VERSATILE WASTE COMPACTOR WITH EXTRA LARGE FEED OPENING



**SMART WASTE MANAGEMENT SOLUTIONS**  
[europressgroup.com](http://europressgroup.com)

**Europress Group Ltd.**  
Huhtimontie 16  
FI-04200 Kerava  
FINLAND  
+358 20 737 3100  
[europress@europress.fi](mailto:europress@europress.fi)

# COMBIMAX XL FEATURES

Can be supplied with a range of accessories.

## Best-selling accessories

- Tipping device
- Lid opening mechanism (hydraulic/electric)
- Custom colour
- Low infeed
- Platform hopper
- Rollers, front/rear



Several standard container sizes  
**10–22 m<sup>3</sup>**



## WASTE FRACTIONS

Sorted mixed waste  
Cardboard  
Dry mixed waste  
Plastic

# TECHNICAL SPECIFICATIONS

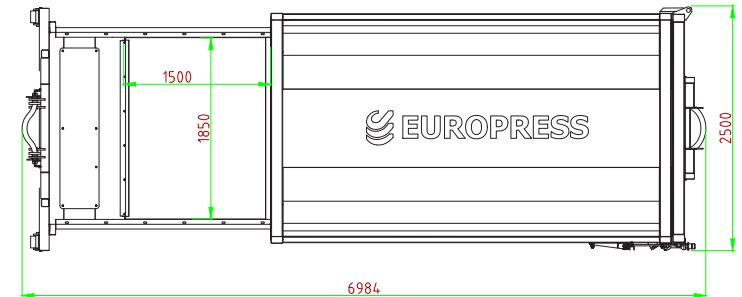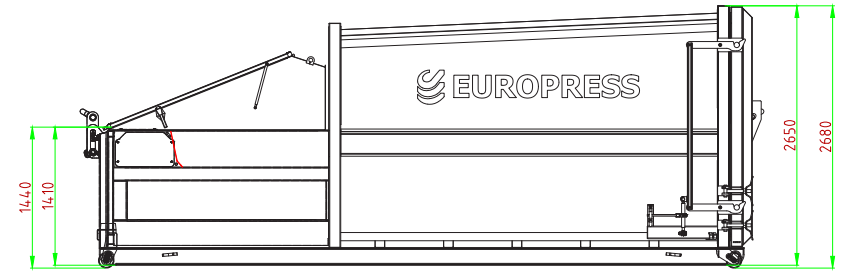

| COMBIMAX XL                       |                                  |
|-----------------------------------|----------------------------------|
| Infeed aperture gross L x H (mm)  | 1930 x 1800                      |
| Infeed aperture net L x H (mm)    | 1850 x 1500                      |
| Compaction force (t)              | 35/40*                           |
| Cycle time (s)                    | 66/35*                           |
| Capacity (m3/h)                   | 78 / 147*                        |
| Infeed height (mm) - front / side | 1410 x 1230 / 1480 x 1300        |
| Noise level (dBa)                 | ≤70                              |
| Motor (kW)                        | 5,5 / 7,5*                       |
| Power supply                      | 400 V, 3×C16 A<br>400 V, 3×C32 A |

**The dimension drawing is of CombiMax compactor with container size of 20 m<sup>3</sup>. This is our best-selling CombiMax XL device.** We manufacture devices in many different sizes, customized to the various needs of our customers. You can find out more about different measurements from our sales or from your own contact person.



CombiMax XL features a spacious service door for the cylinder compartment